


1. Interface: USB/UART
2. Touch point: 10 (win7 and win8), (UART touch point: 2)
3. Cover glass + Sensor glass + OCA + FPC
4. Cover glass Thickness = 1.1mm
5. Sensor glass Thickness = 0.7mm
6. OCA Thickness = 0.2mm
7. Total Thickness = 2mm
8. Sensor Process: Print Process (ITO Pattern + Metal line)
9. Input Voltage: 3.5V-5.5V, Typical 5V
10. Transmittance: >85%
11. Surface Hardness: >6H
12. Operating Conditions: -10°C to 70°C
13. Storage Conditions: -20°C to 70°C
14. Relative Humidity: 95% at 60°C, RH Non-condensing
15. Dimension tolerance: $\pm 0.2\text{mm}$

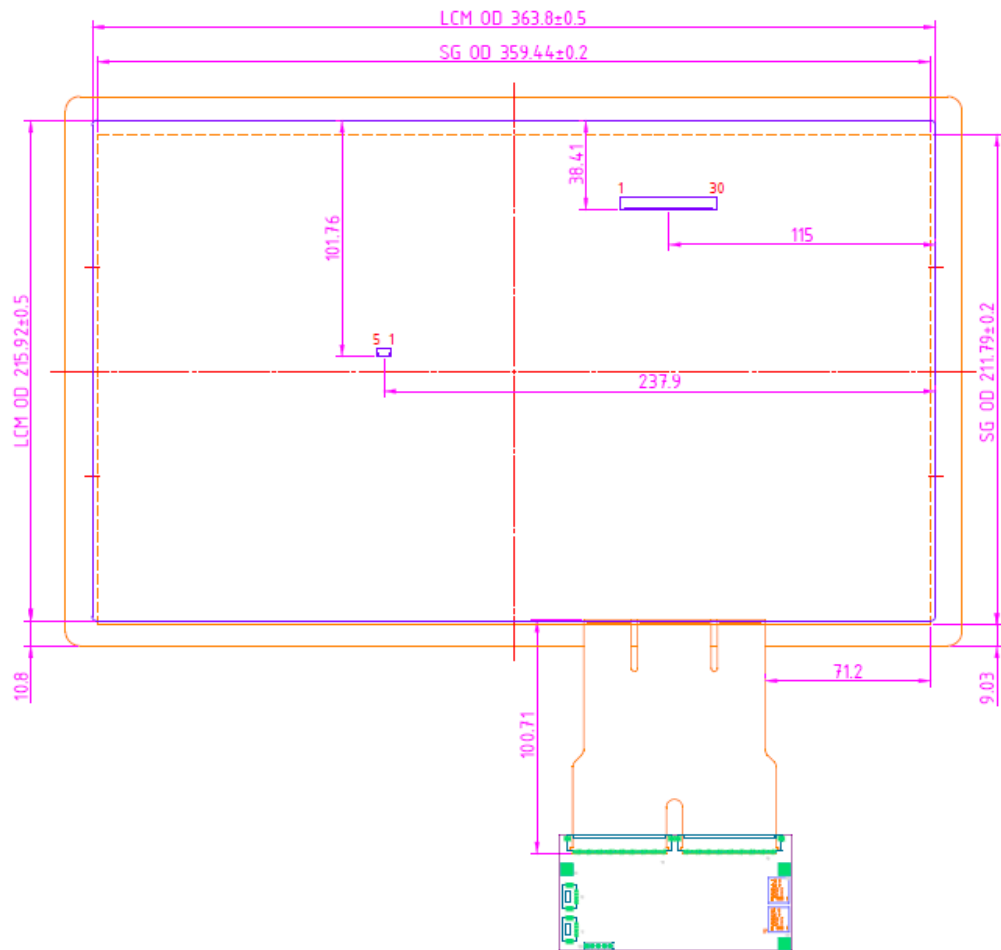

REMARK: SPECIFICATION AND PRICE ARE SUBJECT TO CHANGE WITHOUT NOTICE! PLEASE CONFIRM TO THE SALES DEPARTMENT FOR PRICE AND DELIVERY BEFORE ORDER!